


Dimensions in mm
 Abmessungen in mm

Nominal Force F (N) Messbereich F (N)				
50	75	125	250	500
750	1000	1500	2000	2500


Technical Data	Technische Daten	
- Max. working load (limit load)	200% F	- maximale Gebrauchslast (Grenzlast)
- Ultimate Load	> 300% F	- Bruchlast
- Sensitivity	1.5 mV / V	- Empfindlichkeit
- Accuracy	< 0.2 % F	- Genauigkeit
- Repeatability	< 0.2 % F	- Wiederholgenauigkeit
- Total error	< 0.3 % F	- Totalfehler
- Zero bridge balance	± 1% F	- Nullpunktabweichung
- Temperature effect on zero	± 0.1% F / 10 °C	- Temperatureinfluß auf den Nullpunkt
- Nominal temperature	+10 ... +60 °C	- Nominaltemperaturbereich
- Working temperature	-10 ... +80 °C	- Arbeitstemperaturbereich
- Bridge resistance	350 ohm	- Brückenwiderstand
- Maximum supply voltage	12 Vdc	- Max. Speisespannung
- Protection Level	IP54	- Schutzgrad
- Material	Steel / Stahl	- Material
- Connector	MIL	- Anschlußstecker

**ASSEMBLING EXAMPLES
EINBAUBEISPIELE**

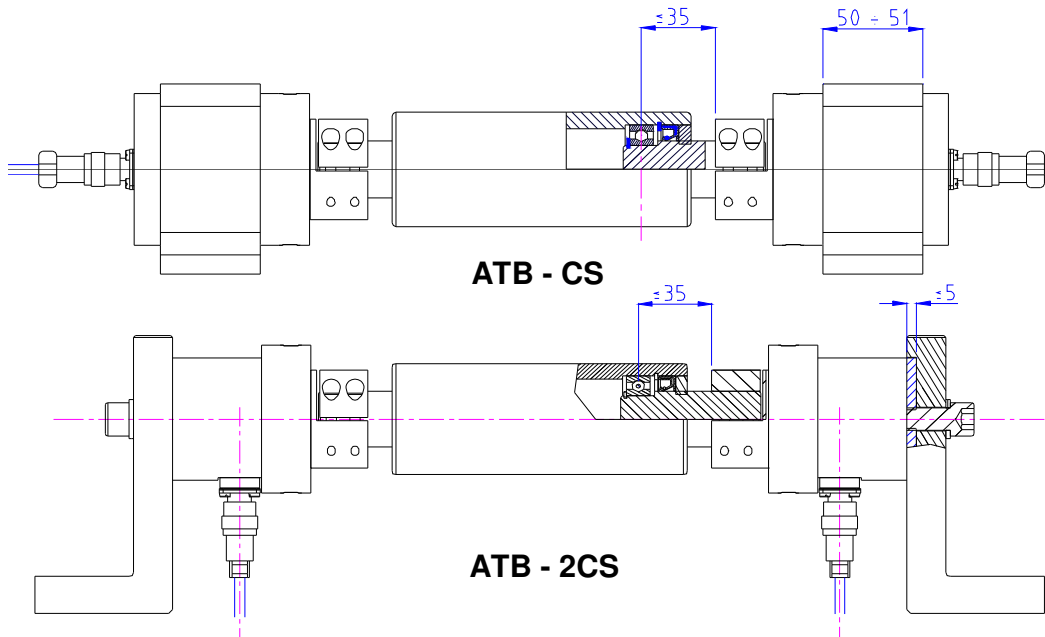

Male connector <i>Zwitterstecker</i>	Suggested Female connector <i>Empfohlen Steckerhülse</i> (90°)	
IPT02A8-4PN436	IPT06A8-4S(SR)N436	IPT08EM8-4S

**ELECTRICAL CONNECTION
ELEKTRISCHE ANSCHLÜSSE**

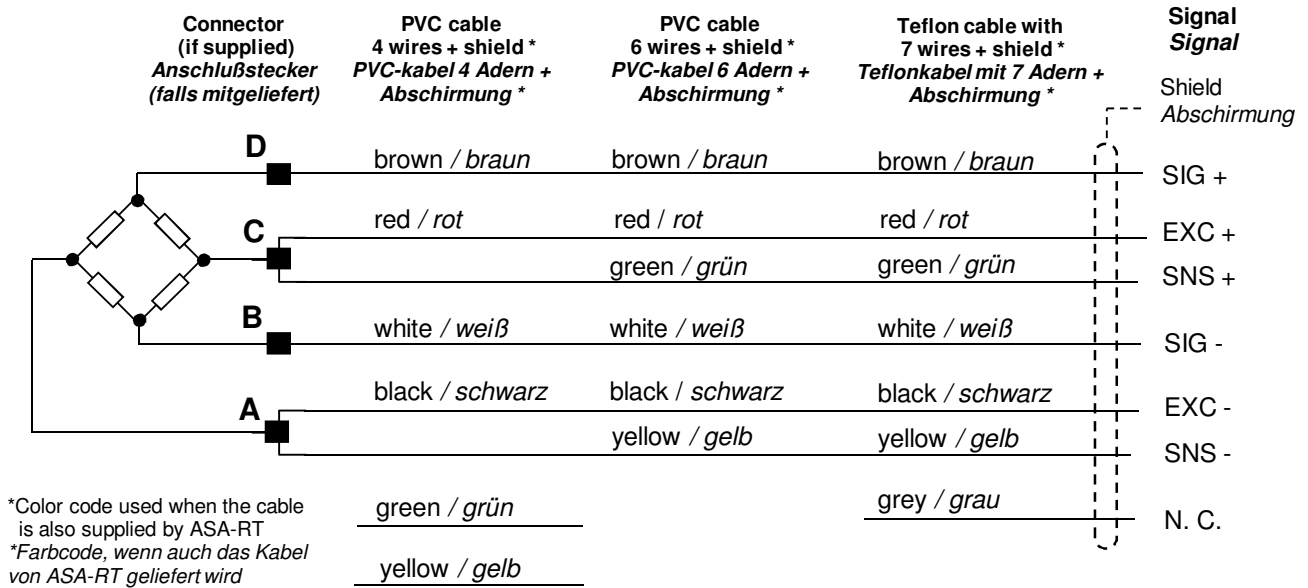

**ORDER CODE
BESTELLCODE**

